

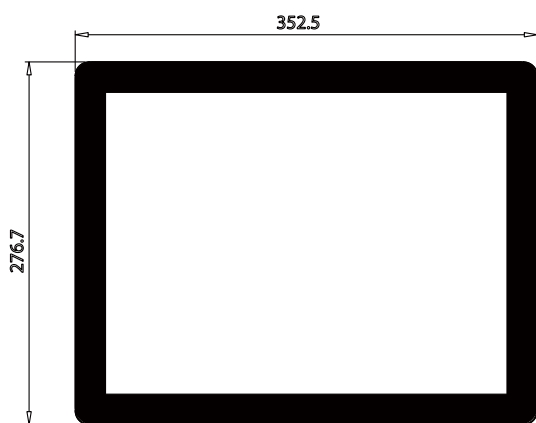



15" Multi-Touch Chassis Display - R15L100-PTC3

Features

- 15" 1024 x 768 Resolution
- Front side strengthened glass
- VGA input and HDMI input
- Stylish and elegant design
- Plastic Housing



45.00

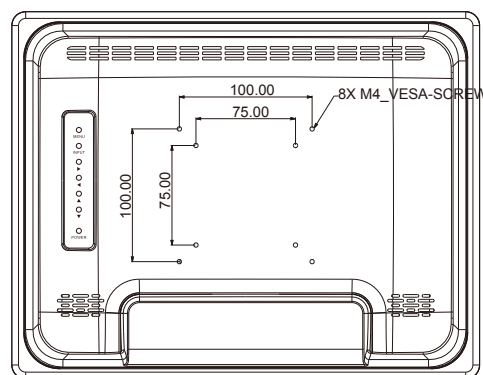

1. 12V DC in
2. Audio in
3. VGA
4. HDMI
5. USB for touch

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Specifications

Display Spec :

- Size/Type : 15" TFT
- Resolutions : 1024x768
- Brightness : 250cd/m² (typ.)
- Contrast Ratio : 700 : 1 (typ.)
- Viewing Angle : -80~80(H);-80~80(V)
- Max Colors : 16.2M
- Front side glass : Optional
- Touch : Projective-Capacitive Touch

Power Specification :

- Power Input : 12V DC 2.5mm, with External AC to DC Adapter comply with Level V1 efficiency standard
- Power Consumption : 10W typical, normal operation

Environment Considerations :

- Operating Temperature : 0 °C to 40 °C
- LCD panel life time : 50,000 hours
- Certificated : CE, FCC Class A, UL, RoHS

Input Specifications :

- Input Ports : 1 x VGA
1 x HDMI
1 x Audio
1 x USB
- OSD Membrane : Buttons lock function
Buttons at the back side
- Speaker : 2 x 1 Watt speaker

Mechanical Specification :

- Mounting : VESA Mount (100x100mm, 75x75mm)
- Dimensions (W x H x D) : 352.5 x 276.7 x 45 (mm)
- Appearance : Back cover color RAL 7016
Plastic casing

Product Accessory :

- Accessory : 12V DC in Adapter
HDMI cable
VGA cable
USB cable for touch

WINMATE

Note: All Specifications are subject to change without prior notice!

CE FC

UL US LISTED E213998 L.T.E.

RoHS COMPLIANT 2011/65/EU

Revised date: 09-Nov-2017 C1.1

IPC2U www.ipc2u.ru www.ipc2u.de www.sovio.com Date: 11/2017 Rev.01