


W15IB7T-PPA4 15.6" P-CAP Panel PC (Intel® Celeron® Bay Trial-M N2930, 1.83GHz)

Mechanical Design




Real Flat Panel Mount (IP65 front side)

Fully Integrated I/O

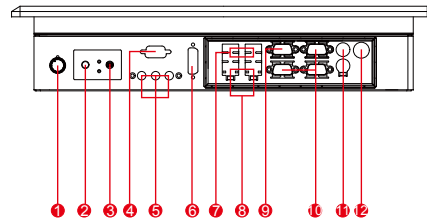

1. Brightness Adjustment Knob
2. Power On Button
3. Power Reset Button
4. RS-232 Conn. (Optional)
5. Audio Jack
6. DVI (Optional)
7. USB
8. LAN
9. VGA Out
10. RS-232 Conn.
11. PS/2
12. DC-IN Power Jack

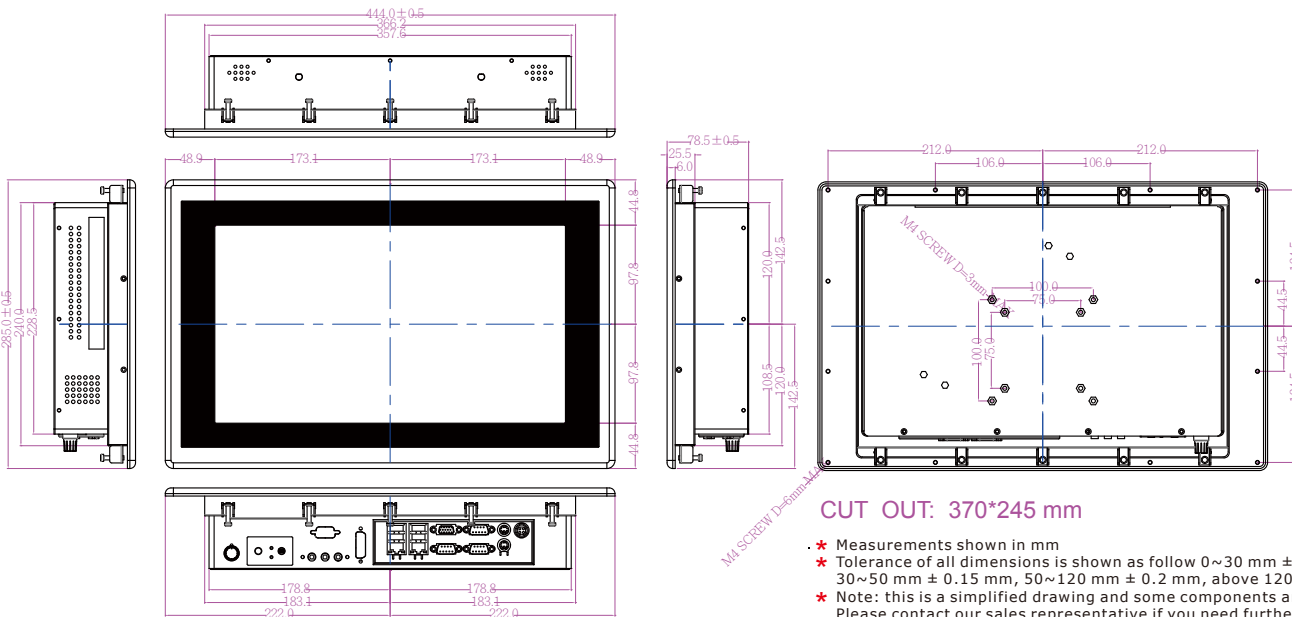

Specifications

System:

- Processor : Intel® Celeron® Bay Trial-M N2930, 1.83GHz
- System Chipset : Intel® Atom SoC Integrated
- SystemMemory : SODIMM DDR3L 1600/1333, max. 8G
- Storage : mSATA SSD 64GB (Default)
- LAN : Intel I210-AT GbE LAN x 2
- Audio Codec : Realtek ALC886 HD Audio Codec

Input / Output :

- Serial Ports : 2 x RS232, 1 x RS232/422/485[○]
- USB Ports : 1 x USB 3.0, 3 x USB 2.0
- Keyboard/Mouse : 2 x PS/2
- Ethernet : 2 x RJ45-10/100/1000 Mbps
- VGA : 1 x VGA (female)
- Audio : Line-out, Line-in, Mic in
- Power : 1 x DC-in Power Jack(+12V) ○ Default: RS232

Expansion Slot :

- Mini PCIe : 2 x Mini PCIe (1 for WiFi, 1 for 3G Module)
- eDP : 1 x eDP by 2x10 DF-13 connector

Power Specifications :

- Power input : 12V DC
- Power Consumption : 58W (typ.)(Max.backlight & high CPU load)

Accessories :

- External Adapter : 110~240V AC Power Adapter

Display :

- Size/Type : 15.6" TFT
- Resolutions : 1920x1080
- Brightness : 300 cd/m (typ.)
- Contrast Ratio : 800 : 1 (typ.)
- Viewing Angle : -85~85(H);-85~85(V)
- Max. Colors : 16.7M
- Touch Screen : Projected capacitive multi-touch

Environment Considerations :

- Operating Temperature : 0°C to 50°C
- Operating Humidity : 30% to 90% (non-condensing)
- IP Rating : Front IP65

OS BSP / Driver Support :

- OS : Windows 10 IoT Enterprise
Windows 7 Embedded
Windows 8 Embedded (Optional)

