PICO-DWARF



Main Features

- The PICO-DWARF reference design is compatible with Intel Edison and TechNexion Pico SoM modules and add a variety of sensors and connectivity to the Pico SoM making it the ideal candidate for IoT (Internet of Things) applications such as drones, wearables, appliances and robotics.
- The complete schematics, design files, board files and BOM lists of PICO-DWARF are available and can be downloaded from the TechNexion homepage.








EDISON

Power 3.3~4.5V	SDIO	I ² S	SPI	PWM
	USB OTG	UART	I ² C	GPIO



2/11 2						
CAN	PCle	HDMI	SATA			
I ² C	USB HOST	MIPI				

EXP-B

Specifications

Core System

System-on-Module Compatible with Intel Edison

connector (1x 70-pin Hirose Connector)

Compatible with TechNexion Pico connectors (3x 70-pin

Hirose Connector)

Connectivity

Network Atheros AR8031 Gigabit LAN Connector RJ-45 LAN Connector

Expansion

Storage 1x SATA data + power connector

1x micro SD cardslot

USB 1x USB 2.0 Host connector

1x USB 2.0 OTG connector

Expansion Pin Headers Single Channel LVDS

24-bit TTL RGB

PCIe CAN GPIO PWM

I²C SPI UART

Video

External Display HDMI connector

Internal Display Single Channel LVDS (expansion header)

24-bit TTL RGB (expansion header)
MIPI DSI Display on 33-pin FPC Connector

Camera MIPI CSI signals on 33-pin FPC connector

Audio

Audio Codec Freescale SGTL5000

Audio Connectors 1x 3.5 mm jack Stereo Audio in

1x 3.5 mm jack Stereo Audio out 1x 3.5 mm jack Microphone

Power Specifications

Input Power 5 VDC +/- 5%

Power Connector 5.5 / 2.1mm barrel jack

Battery Charging Circuit Freescale MC32BC3770CSR2 Single Cell

Lipo Battery Charging Circuit


Battery Connector 2 pin header

Sensors

Altimeter Freescale MPL3115A2
3D Accelerometer Freescale FXOS8700CQ
Gyroscope Freescale FXAS21002

RTC DS1337+ with backup battery

Block Diagram

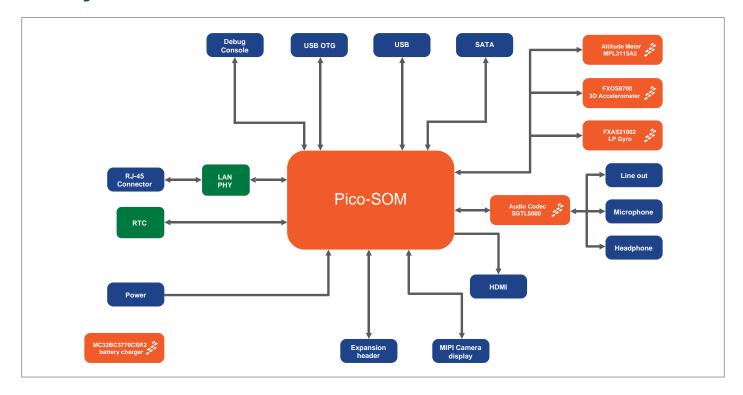

Environmental and Mechanical

Commercial: 0° to 60° C Temperature


Humidity 10 to 90% Dimensions 95 x 95 mm

3¾ x 3¾ inch

MTBF >100,000 hours Weight 40 grams 50G / 25ms Shock 20G / 0-600 Hz Vibration

Dimensions

(units in mm)

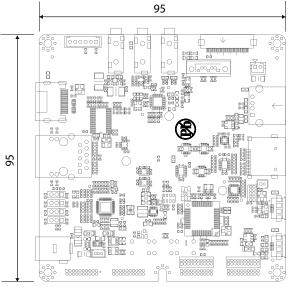

Ordering Information

PICODWARF

PICO-DWARF Baseboard for PICO-SOM

* Feel free to contact us for custom tailored Carrier Board request for your projects.