
1U, SINGLE SLIDE RAIL, LCD KEYBOARD DRAWER 16 PORT PS2 OR COMBO KVM SWITCH

Specification

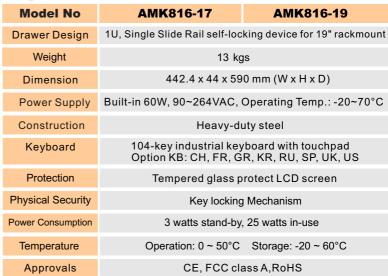

LCD Display

Size	17"	19"	
Resolution	1280 x 1024	1280 x 1024	
Contrast Ratio	1000 : 1	1000 : 1	
Viewing angle	170(H)/160(V)	170(H)/160(V)	
Display Colors	16.7M		

KVM Switch

			PS2 KVM	PS2 & USB COMBO KVM
	Port connection	KVM Port	16-Port	
		Max. Port	Daisy Chain up to 8 levels to support 128 sets	
	Port Selection		16x Front Push Buttons, OSD Manu, Hotkey	
t	Switch	Port Selection	16x Front Push Buttons	
		Reset	1x push button	
		Power	1x Rocker Switch	
		LCD on/off	1x Front standby Push button	
		LCD control	4x LCD adjust push buttons	
	LED	Operation	16	
		Power	16	
		Keyboard Lock	Num Lock, Caps Lock, Scroll Lock	
	KVM Cable		16x 1.8m PS2 cable	16x 1.8m USB cable

Ordering Information

AMK816-17PBUS

1U, 17" LCD keyboard, 16 ports PS2 KVM switch with 16 x 1.8m KVM cable ${\bf AMK816\text{-}17CBUS}$


1U, 17" LCD keyboard, 16 ports Combo KVM switch with 16 x 1.8m KVM cable AMK816-19PBUS

1U, 19" LCD keyboard, 16 ports PS2 KVM switch with 16 x 1.8m KVM cable **AMK816-19CBUS**

1U, 19" LCD keyboard, 16 ports Combo KVM switch with 16 x 1.8m KVM cable

Option

- 80W, 24~48 VDC Power Supply
- 1.8m, 3.0 m, 5.0 m KVM cable
- Keyboard layout: CH, FR, GR, KR, RU, SP, UK, US








Features

- 1U, Single Rail, built-in A-grade 17" or 19" TFT LCD 16-port PS2 or Combo KVM switch
- Includes a key-locking mechanism to prevent unauthorized access
- 104-key industrial keyboard with touch pad
- Provides up to 130-degree monitor rotation for viewing flexibility
- Built-in rail self-locking device
- Tempered glass protect LCD screen

KVM Switch

- 16 port PS2/ COMBO KVM with military industrial grade production
- Support Password protection and Server name
- Support extra daisy chain port and no waste server port for expansion
- Support Windows, DOS, Netware, Unix, Linux, iMAC, Power MAC and Sun Micro Systems with USB
- Hot Plug- add or remove connected computer without powering off the KVM switch or computer
- No software required. Easy computer selection via
- Front Push Button, Hot Key, OSD menu

 Auto Scan mode. Easy to monitor Server Operation
- The countries of the monitor converse personal
- Superior Video Bandwidth up to 200MHz
- Keyboard status restored upon Server switched
- LED display for status monitor
- Buzzer sound for Server switched confirmation



www.ipc2u.de www.sovio.com Date: 01/07/2016