

ITP-12164XTM-12PH

12x 10/100Base M12 with 8x PoE + 16x GbE M12 with 4x PoE and 4x 10G M12, 80W, 24/48/72/110VDC

- ▲ 24/48/72/96/110VDC redundant dual isolated input power
- ▲ Regulated PoE output voltage
- ▲ Auto checking and auto reset when PoE PD fail
- ▲ EN50155, EN50121-4, EN45545-2, EN61000-6-2, EN61000-6-4, CE and FCC Certified



The EN50155 certified managed PoE switch ITP-12164XTM-12PH, that provides 4 10Gigabit, 16 Gigabit M12 X-code Ethernet ports and 12 Megabit M12 D-code, features total 12 ports PoE and supports a variety of PoE operation functions, including automatic detection of PoE device power, automatic reset, PoE scheduling, etc. Designed for heavy industrial, vehicle and rolling stock applications, utilizing M12 connectors to ensure secure connections and reliable operation, withstand environmental disturbances such as vibration and shock, uses M12 K-code connector 24/48/72/110VDC switching power input design compatible with variety railway and vehicle's power source requirement. EN50155 certification covers operating temperature, mains input voltage, surge, ESD, vibration and shock, making the switch suitable for vehicle, rolling stock applications.

Features

- M12 (D-code, X-code, K-code) connector against vibration and shock, M12 D-code for FE port, X-code for GbE or 10G port, K-code for power
- Cable diagnostics, identifies opens/shorts distance
- STP, RSTP, MSTP, ITU-T G.8031 ERP, ITU-T G.8032 Ethernet Protection Ring (ERPS) for redundant cabling
- Provides up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses.
(Please see CTC Union's μ-Ring white paper for more details)
- μ-Ring for Redundant Cabling, recovery time<50ms in 250 maximum devices
- Supports TTDP for train application
- Supports EMS Management

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE802.3an	10GBase-T 10G bit/s Ethernet over twisted pair
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	ITU-T G.8031 / Y.1342	EPS (Ethernet Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ac	Max frame size extended to 1522Bytes

EN50155 Managed 10G PoE Switch

Standard	IEEE 802.3ad	Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)																		
	IEEE 802.1AX	Link aggregation for parallel links with LACP (Link Aggregation Control Protocol)																		
	IEEE 802.3x	Flow control for Full Duplex																		
	IEEE 802.3af	PoE (Power over Ethernet)																		
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)																		
	IEEE 802.1ad	Stacked VLANs, Q-in-Q																		
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization																		
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)																		
	IEEE 802.3az	EEE (Energy Efficient Ethernet)																		
VLAN ID	4094 IEEE802.1Q VLAN VID																			
Switch Architecture	114.4Gbps (Full wire-speed)																			
Data Processing	Store and Forward																			
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode																			
PoE Port	12x PoE port (8x PoE for D-code FE port, 4x PoE for X-code GbE port) Maximum PoE output power budget 80W (30W/per port), Regulated PoE output voltage at 52VDC IEEE 802.3af / IEEE 802.3at End-Span, Alternative A mode																			
Network Connector	12x M12 D-code Female for 10/100Base-TX UTP, with 8x PoE 16x M12 X-code Female for 10/100/1000Base-T UTP, with 4x PoE 4x M12 X-code Female for 100/1G/2.5G/5G/10G Base-T UTP UTP port provides auto negotiation speed, Auto MDI/ MDI-X, Full/Half duplex function 4x 10G UTP port for 2 set bypass																			
Console	RS-232 (5-pin A-Code M12 male)																			
2x Rotary Switch (0~15)	1 for Switch IP setting, 1 for Gateway IP setting																			
Network Cable	UTP/STP Cat. 5e cable or above																			
	EIA/TIA-568 100-ohm (100meter)																			
Protocols	CSMA/CD																			
Reverse Polarity Protection	Supported																			
Overload Current Protection	Supported																			
CPU Watch Dog	Supported																			
LED	System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber)																			
	UTP: 10/100 Link/Active (Green), 2.5G/5G/10G Link/Active (Blue)																			
	PoE : ON (Green)																			
Jumbo Frame	10KB																			
MAC Address Table	32K																			
Memory Buffer	4M Bytes for packet buffer																			
Device Memory	16M Bytes Flash ROM, 1G Bytes RAM																			
Power Supply	Provides 1x M12 K-code (5-Pin, male) for redundant dual isolated DC 24/48/72/96/110VDC (16.8~137.5VDC) wide input power Regulated PoE output voltage (52VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter																			
Power Consumption	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>Total Power Consumption</th> <th>Device Power Consumption</th> <th>PoE Budget</th> </tr> </thead> <tbody> <tr> <td>24 VDC</td> <td>136W</td> <td>49W</td> <td>80W</td> </tr> <tr> <td>48 VDC</td> <td>129W</td> <td>48W</td> <td>80W</td> </tr> <tr> <td>110 VDC</td> <td>128W</td> <td>48W</td> <td>80W</td> </tr> </tbody> </table>				Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	24 VDC	136W	49W	80W	48 VDC	129W	48W	80W	110 VDC	128W	48W	80W
	Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget																
	24 VDC	136W	49W	80W																
	48 VDC	129W	48W	80W																
110 VDC	128W	48W	80W																	
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay																			
Alarm Relay Contact	5-pin M12 A-code male, Relay outputs with current carrying capacity of 1 A @24VDC																			
Operating Temperature	-40 ~ 60°C																			
Operating Humidity	5% to 95% (Non-condensing)																			
Storage Temperature	-40 ~ 85°C																			
Housing	Rugged Metal, Fanless, IP40 grade housing protection																			

Dimensions	128 x 418 x 207mm (Dx Wx H)
Weight	8.1Kg
Installation Mounting	Wall mounting
MTBF	90,646Hours (MIL-HDBK-217)
Warranty	5 years

Certification

EMC	CE (EN55024, EN55032)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50155, and EN50121-4
Fire protection of railway vehicles	EN 45545-2
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Shock	IEC-61373
Freefall	IEC 60068-2-32
Vibration	IEC-61373

Software Specifications

Topology

VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID
	IEEE 802.1q VLAN, up to 4094 Groups
	IEEE 802.1ad Q-in-Q
	MAC-based VLAN, up to 256 entries
	IP Subnet-based VLAN, up to 128 entries
	Protocol-based VLAN (Ethernt, SNAP, LLC), up to 128 entries
	VLAN Translation, up to 256 entries
	Private VLAN for port isolation
	GVRP (GARP VLAN Registration Protocol)
	MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Voice VLAN
	Static (Hash with SA, DA, IP, TCP/UDP port), up to 16 trunk group
	Dynamic (IEEE 802.3ad LACP), up to 16 trunk group
Support IEEE802.1AX passive and active mode	
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ -Ring	Up to 5 instances that each supports μ -Ring, μ -Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings.
	Recovery time <50ms
	The maximum number of devices allowed in a Ring supported ring is 250.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms
	Single Ring, Sub-Ring, Multiple ring topology network
ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)	Supported

QoS Feature

Class of Service	IEEE802.1p 8 active priorities queues per port
Traffic Classification QoS	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps"
Bandwidth Control for Egress	100~1,000,000 when the "Unit" is "kbps", and 1~1,000 when the "Unit" is "Mbps" Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast

IP Multicasting Feature

IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile, Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
---------------------	--

Security Features

IEEE 802.1X	Port-Based, MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS	Authentication & Accounting
TACACS+	Authentication, Authorization, Accounting
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
User Name Password Authentication	Local Authentication Remote Authentication (via RADIUS / TACACS+)
Management Interface Access Filtering	Web, Telnet / SSH, CLI, RS-232 console

Management Features

CLI	Cisco® like CLI
Web UI	Supported
Telnet	Server
SNMP	V1, V2c, V3
sFlow	Supported
Modbus/TCP	Supports for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
FTP client	Supports for upload/download configuration
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB II	RFC 1213
UPnP	Supported
BOOTP	Supported
DHCP	Server, Client, Relay, Relay option 82 , Snooping
RARP	Supported
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164) (Support 3 server), store in non-volatile Flash ROM, 10240 recore

EN50155 Managed 10G PoE Switch

Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
NTP, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED


IPv6 Features

IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2: Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP

Others Features

Advanced PoE Management	PoE PD Failure Auto Checking, and Auto reset when PD fail PoE Scheduling (On/Off schedule weekly) PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Power feeding priority Total PoE Power budge limitation (maximum 80W)
-------------------------	---

Dimensions

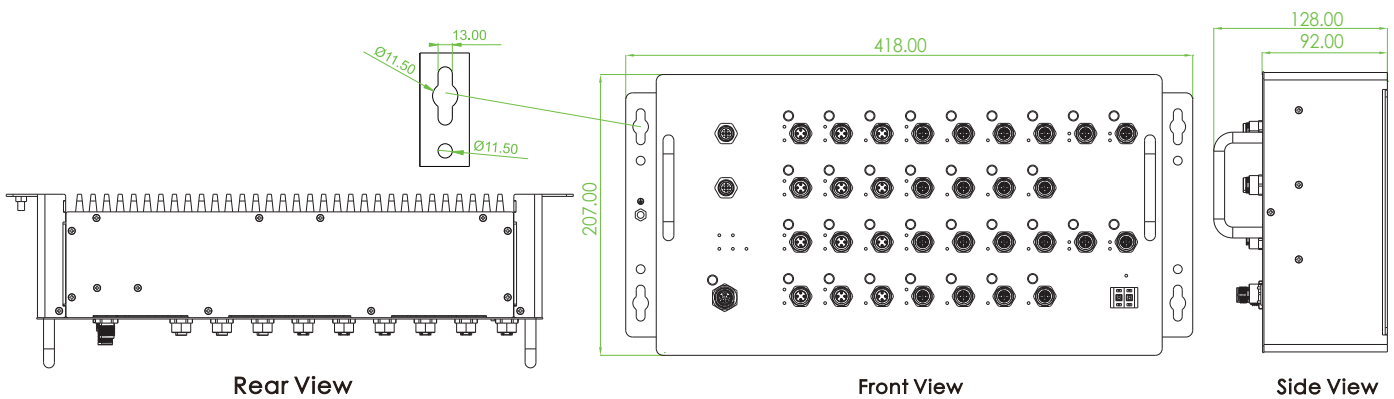

Optional Accessories

Model Name	Managed	Total Port	FE Port	GbE	10G Port		PoE Port		Redundant Dual Input Power
			D-code M12	X-code M12 UTP	X-code M12 UTP	10G X-code M12 Bypass	IEEE802.3 af/at	PoE Total Power Budget	
ITP-12164XTM-12PH	V	32	12	16	4	4	12	80W	V

Model Name	Certification					
	EN45545-2	EN50155	EN50121-4	EN61000-6-2 EN61000-6-4	CE, FCC	IEC61373
ITP-12164XTM-12PH	V	V	V	V	V	V