
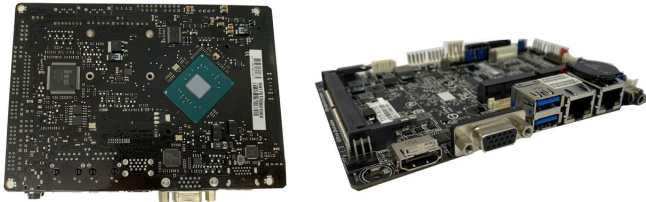


Features

- Intel Apollo Lake processor
- Intel Gen. 9 Graphics DX 12, OGL 4.2
- 4 x COM, 8 x USB, 2 x Gigabit LAN
- 2 x Mini-PCIe (1 x co-lay with mSATA)
- Support triple displays for VGA, HDMI, LVDS
- Support 9 - 36V Power Input

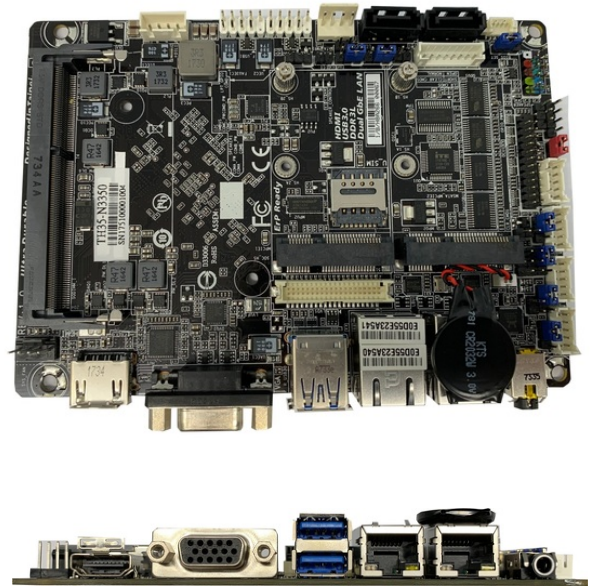

Core System

CPU	Intel Celeron Apollo Lake J3455 CPU Dual-Core, up to 2.3 GHz, TDP 10W
System Memory	DDR3L-1600/1866 MHz, 1 x SO-DIMM, up to 8GB
Chipset	SoC integrated
BIOS	AMI
Storage	2 x SATA 3.0, 1 x SATA share with mSATA
Watchdog Timer	1 - 255 steps by software program
Expansion Slot	2 x Mini-PCIe (1 x co-lay with mSATA)
Power Input	DC-in 9 - 36V
Smart Fan Control	-
Dimensions	146 x 105 mm, 3.5-inch
Operating Temperature	0°C to +60°C (+32°F to +140°F)
Storage Temperature	-20°C to +70°C (-4°F to +158°F)
Humidity	10% to 95% relative humidity, non-condensing

Rear I/O

USB	2 x USB 3.0
Display I/O	1 x VGA 1 x HDMI
Audio I/O	1
LAN I/O	2 x RJ-45, Realtek RTL8111H Giga LAN
Serial Port	-
PS/2 Port	-
Others	-

Internal Connectors

USB	6 x USB 2.0
Display I/O	1 x LVDS
Audio I/O	Realtek 5.1 channel HDA Codec, with MIC/Line-out
Serial Port	4 x RS-232 (COM1/2 support RS-232/422/485)
Parallel Port	1 x co-lay with 8-bit DIO
GPIO	1 x GPIO Header (Programmable support 8-bit GPIO)
Others	1 x I2C, 1 x SMBUS 1 x Speaker header 1 x DC 9 - 36V 4-pin ATX Power Input Connector

Graphics

Chipset	Intel Gen. 9 Graphics DX 12, OGL 4.2
VGA	Up to 1920 x 1200 @ 60Hz
DVI	-
HDMI	Up to 3840 x 2160
Display Port	-
LVDS	Up to 1920 x 1200 @ 60Hz
eDP (Option)	-

Others

OS Support	Windows 10, Windows 7, Linux
Certifications	CE / FCC Class B