W24L100-GCA2

23.8" G-WIN GC-Series Front IP65 PCAP Display




KEY FEATURES

- 23.8" 1920 x 1080 Resolution PCAP Display
- VGA input and HDMI input
- Projected Capacitive Multi-Touch
- Front IP65 for protection against water and dust



SPECIFICATIONS

| Display | | | |
|--------------------|---|--------------------------|--|
| Resolution | 1920x1080 | Size | 23.8 inches |
| Contrast Ratio | 3000:1 | Panel Brightness | 250 nits |
| Display Color | 16.7M Colors | View Angles | 89,89,89,89 |
| Touch / Glass | Projected Capacitive Multi Touch Screen | | |
| Environment | | | |
| Operating Humidity | 10% to 90% (Non-Condensing) | Operating Temperature | 0~50°C |
| Shock | 40g for 11ms | Vibration | 1.48/1.90/2.24 g rms for XYZ/ 5-500Hz |
| IP rating | Front IP65 | | |
| Certification | | | |
| Certification | CE, FCC | | |
| IO Ports | | | |
| USB Port | 1 x USB for Touch Screen | Video | 1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional) |
| Mechanical | | | |
| Dimension | 588 x 358 x 55 mm | Mounting | VESA Mount/ Panel Mount |
| Enclosure | Plastic Bezel & Metal back cover | Cooling System | Fanless Design |
| Accessory | | | |
| Accessory | 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) | Optional Accessory | Remote Controller (Optional, Varies by product) |
| Power | | | |
| Power Rating | 12V DC input | | |
| Control | | | |
| Button | 5 Keys: - , + , Power , Esc , Enter | | |

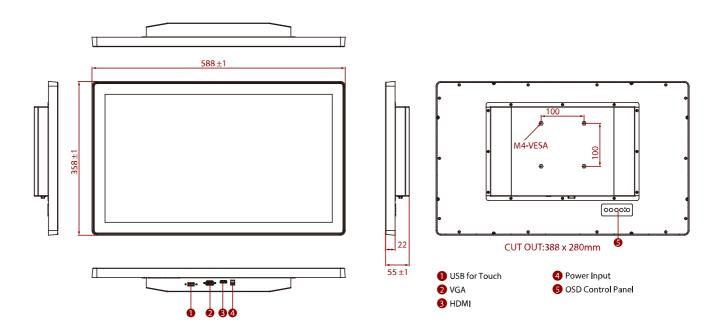

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
- 3. All specifications are subject to change without prior notice.
- 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.